


HAMMER DRIVE ANCHOR STAINLESS STEEL

พู่กันตะปู “SANKO” สแตนเลส

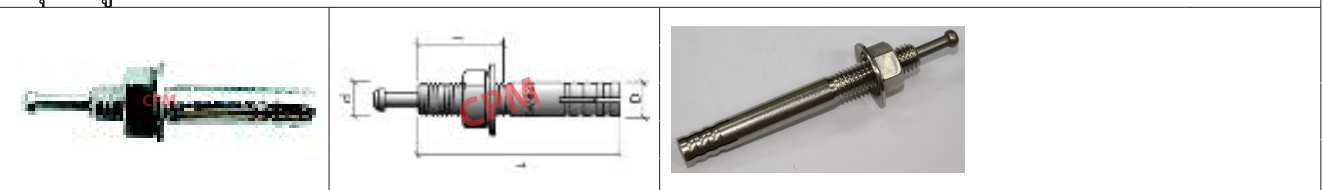

Size	เส้นผ่าศูนย์กลาง		ความยาว		แรงดึง (Kg.)		แรงเฉือน (Kg.) Shear	ความลึก รูคอนกรีต	บรรจุ		Unit Price
	เกลียว-ปลั๊ก (D)	สว่าน Drill Hole	ปลั๊ก (L)	เกลียว (H)	Tensile				BOX	CTN	
					ครั้งแรก	ครั้งสุดท้าย					
SC - 645	6	6.4	45	15	300	475	652	30	50	800	
SC - 660	6	6.4	60	20	300	475	652	30	50	800	
SC - 850	8	8.5	50	20	450	705	1,030	35	100	800	
SC - 870	8	8.5	70	25	450	705	1,030	35	50	400	
SC - 1050	10	10.5	50	20	732	1,180	1,640	40	50	400	
SC - 1060	10	10.5	60	25	732	1,180	1,640	40	50	400	
SC - 1080	10	10.5	80	25	732	1,180	1,640	40	50	300	
SC - 1090	10	10.5	90	30	732	1,180	1,640	40	50	300	
SC - 1010	10	10.5	100	30	732	1,180	1,640	40	50	300	
SC - 1012	10	10.5	120	30	732	1,180	1,640	40	50	200	
SC - 1260	12	12.7	60	20	1,360	1,826	2,380	50	30	240	
SC - 1270	12	12.7	70	25	1,360	1,826	2,380	50	30	240	
SC - 1290	12	12.7	90	30	1,360	1,826	2,380	50	30	180	
SC - 1210	12	12.7	100	40	1,360	1,826	2,380	50	30	180	
SC - 1212	12	12.7	120	50	1,360	1,826	2,380	50	30	120	
SC - 1680	16	17.0	80	40	2,425	3,215	4,890	60	15	90	
SC - 1610	16	17.0	100	40	2,425	3,215	4,890	60	15	90	
SC - 1612	16	17.0	120	40	2,425	3,215	4,890	60	15	90	
SC - 1615	16	17.0	150	50	2,425	3,215	4,890	60	15	60	